

Control Keyboard

CX-CK101 / CX-CK201

Feature

- RS-485 baud rate: support 2400, 4800, and 9600
- Support multiplexer/ speed dome/ matrix(CX-CK201)/ DVR control
- 320 x 240 dots LCD with touch panel(CX-CK201)
- 2 axis and 3 axis(CX-CK201) joystick control
- Password protection supported
- Preset point edit function
- Allow using RS-232 to download/ update software
- Matrix mode allows CX-CK201 x 8 installed



CX-CK101







CX-CK201





Specification

Model	CX-CK101	CX-CK201
Joystick	Multi-speed control (2 Axis)	Multi-Speed control (3 Axis)
Connector	RJ11 , 6 pin for RS485	RJ11, 6 pin for RS485
Network Function	RS232, RS485	RS232 x 1, RS485 x 2
Baud Rate	2400, 4800, 9600	2400, 4800, 9600
Interface Specification	8 data bits, no parity, 1 stop bit	8 data bits, no parity, 1 stop bit
LCD Display	20 x 4 LCD	320 x 240 graphic LCD with touch panel
Time / Date	RTC-IC with battery	RTC-IC with battery
LCD Life		80000 hours
Power Source	DC12V / 500mA	DC 12V / 1A
Power Consumption	6W	12W
Weight	N.W./ G.W.: 1.9kg / 2.5kg	N.W./G.W.: 2.4kg / 3.2kg
Dimension	326(W) x 203(D) x 74(H)mm	406(W) x 259.94(D) x 100.88(H)mm

Dimension

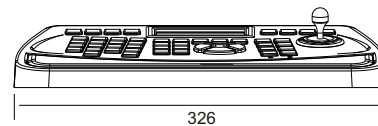

CX-CK101



CX-CK201

ERROR: rangecheck
OFFENDING COMMAND: .buildshading2

STACK:

-dictionary-
-dictionary-
-savelevel-